




12-1 qt. containers 20-1510
6-1 gal. containers 20-1520
other sizes available

## UTILITY

700 MAIN STREET
WESTBURY, NY 11590 U.S.A.
(516) 997-6300
FAX# (516) 997-6345
www.UtilityChemicals.com



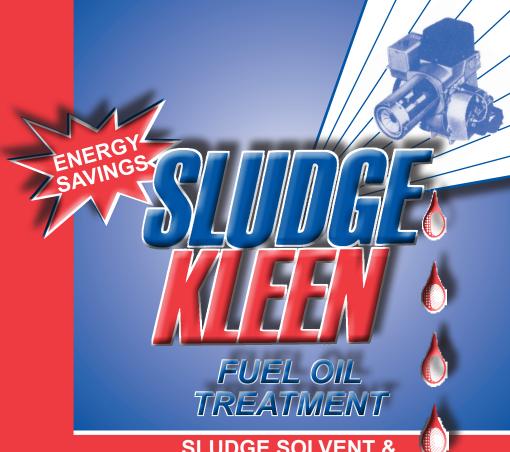

SLUDGE SOLVENT & FUEL OIL CONDITIONER

- Reduces Maintenance Costs
- Economical
- Safe for Fuel Oil Tank & Furnace

## MAKE EVERY DROP OF FUEL OIL COUNT

- Disperses Sludge InstantlyPrevents Rust Formation
- Inhibits Soot Formation Gives Steadier & Uniform Heat
- Assures Burning of all the Fuel Oil
  Removes Scale
- Eliminates Water Condensation
- Prevents Sludge from Clogging Fuel Lines

**SLUDGE KLEEN** is miscible with any type of oil and for any type of burner.

SLUDGE KLEEN prevents and eliminates Sludge, Tar, Gum, Soot, Carbon

Deposits and Rust.

SLUDGE KLEEN results in the emulsification of oil that has been

contaminated with water deposits

For all grades of fuel oil, corrects & prevents clogged nozzles

Regular use of this treatment means:

Cleaner firing

Quicker starting

Fuel oil savings

Overall efficiency

This is a preventative treatment

Use one quart of **SLUDGE KLEEN** per 1,000 gallons. Pour **SLUDGE KLEEN** into the feed pipe of the fuel oil tank. It may be introduced at any time - before, during or after delivery of the fuel oil.